

ROYPOW TECHNOLOGY CO., LTD. has a policy of improving products continuously. All the information in this catalogue is provided for reference only. We reserve the right to make revisions as well as product alterations and improvements at any time without prior notice. Trademarks are the property of ROYPOW TECHNOLOGY CO., LTD. or their respective owners.

Version: February 26, 2025, LiFePO₄ Batteries for Electric Excavators



ROYPOW Technology Co., Ltd.

Tel: +86 (0)752-327 9099

Email: sales@roypow.com
service@roypow.com
marketing@roypow.com

Web: www.roypow.com

Add: ROYPOW Industrial Park, No.16, Dongsheng South Road,
Chenjiang Street, Zhongkai High-Tech District, Huizhou City,
Guangdong Province, China

ROYPOW (USA) Technology Co., Ltd.

Tel: +1 512 688 5555 (Texas Office)

Email: sales@roypowusa.com
service@roypowusa.com

Web: www.roypow.com

Head Office: 5901 Triumph St, Commerce, CA 90040, USA

Texas Office: 2350 Campbell Creek Blvd #100 Richardson, TX 75082, USA

Florida Office: 277 Douglas Avenue, Unit 1004, Altamonte Springs, FL 32714, USA

Indiana Office: 5545 W Raymond St, Ste H Indianapolis, IN 46241, USA

Georgia Office: 1150 Cobb International PI NW Ste E, Kennesaw, GA 30152, USA

ROYPOW Technology UK Limited

Tel: +44 (0) 7918 955 940

Email: sales.uk@roypow.com

Add: Regus Green Park, 200 Brook Dr, Reading RG2 6UB, UK

ROYPOW Battery Technology (Pty) Ltd

Email: sales.za@roypow.com

Tel: +27 69 89 55555

Add: 53 Lake Rd, Longmeadow Business Estate, Edenvale, 1609, South Africa

ROYPOW (Europe) Technology B.V.

Email: sales.eu@roypow.com

Tel: +31 702 001 114

Web: www.roypoweurope.com

Add: K.P. van der Mandelelaan 84, 3062 MB Rotterdam,
The Netherlands

ROYPOW Australia Technology Pty Ltd

Email: sales@roypowtech.com.au

Tel: +61 29185 0814

Web: www.roypowtech.com.au

Add: Suite 803a, 18 Orion Road, Lane Cove, NSW, 2066, Australia

ROYPOW Technology GmbH

Tel: +49 (0) 176 2358 8956

Email: sales.de@roypow.com

Web: www.roypow.gmbh

Add: Rosa-Parks-Straße 4, 64295 Darmstadt, Germany

ROYPOW株式会社

Tel: +81 090 7092 6969

Email: info@roypow.co.jp

Web: www.roypow.co.jp

Add: 〒271-0094 千葉県松戸市上矢切299- 7

ROYPOW Technology Co., Ltd (Korea)

Tel:1555-2016

Email: sales.kr@roypow.com

Add: 2405, G1DC Gwangmyeong station A Dong, 43 Iljik-ro,
Gwangmyeong-si, Gyeonggi-do, Korea



Global Lithium+ Solution Provider

LiFePO₄ Batteries for Electric Excavators

Powering Excavating Excellence.
Redefining Unmatched Productivity



sales@roypow.com

www.roypow.com



Scan it!

ROYPOW

For One-stop New Energy Solutions

- R&D, manufacturing and sales of motive power systems and energy storage systems as one-stop solutions
- Fully automatic production lines, a full range of test equipment and an advanced MES
- Covering Low-Speed Vehicles' Batteries, Industrial Batteries, as well as Residential ESS, Commercial & Industrial ESS, and Mobile ESS
- Self-development of power electronics technologies, including PCS, BMS, and EMS



750+ Employees
190+ R&D People
105,000 m² Headquarters Floor Area
2,500 m² Testing Center
231 Patents

Quality Control Certificates:

- ✓ Environmental Management System: ISO 14001:2015
- ✓ Occupational Health and Safety Management System: ISO 45001:2018
- ✓ Quality Management System: ISO 9001:2015, IATF16949:2016
- ✓ Information Security Management System: ISO/IEC 27001:2022
- ✓ Social Accountability Management System: SA8000:2014
- ✓ Hazardous Substance Process Management: IECQ QC 080000



Product Certifications:

UL 1973, UL 9540A, UL 9540, UL 2580, UL 2271, UL 1741
 IEC 62619
 EN 62477, EN 62040, (EU) 2023/1542, EN 62109-1, EN 62109-2

UL **EMC** **FCC, IEC/EN 61000-6, BS EN IEC 61000-6**
GRID **Function Safety** **IEC 60730, ISO 13849-1**
CB **Transport** **UN 38.3**
CE **RoHS** **RoHS Directive 2011/65/EU & (EU) 2015/863**

R&D and Manufacturing Highlights


As a result of these investments, ROYPOW is capable of "end-to-end" integrated delivery, making our products out-perform the industry norms.

- Fully Automatic Production Lines
- BMS, PCS, EMS All Designed in House
- All-round Testing
- Advanced MES System

Global Sales and Service Network

- Timely Delivery
- Hassle-free After-sales Service
- Fast Response Technical Support

ROYPOW has comprehensively unfolded its overseas market layout to ensure the localization of R&D, manufacturing, marketing and service, becoming one of your most reliable and valuable partners.

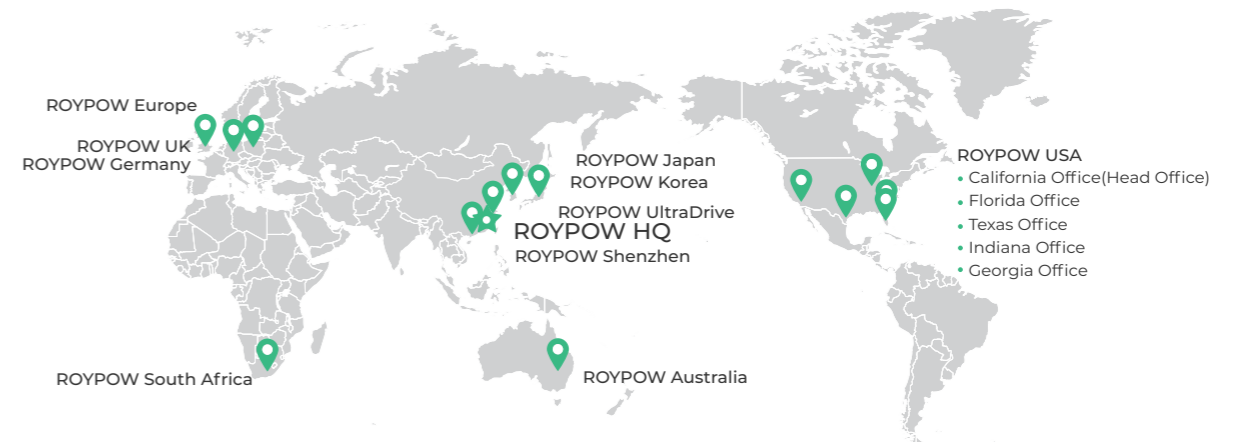


Upgrading to New Technology, with Our Turnkey Solutions.

With years of dedication to new energy solutions, we are proud to offer customers professional solutions for:

- Low-speed Vehicle Batteries
- Battery Systems for Off-highway Applications
- Residential Energy Storage Systems
- Mobile Energy Storage Systems
- Industrial Batteries
- Battery Systems for Emerging Applications
- Commercial & Industrial Energy Storage Systems
- Motors, Controllers and Chargers



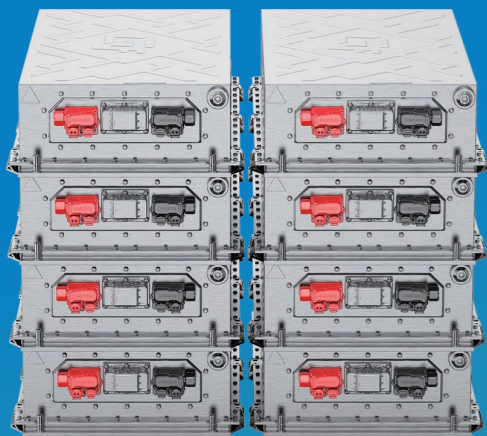

LiFePO₄ Batteries for Electric Excavators

In the battery-powered excavator construction equipment industry, business requires batteries that won't tire out no matter the task. ROYPOW comes in handy and gives your excavators full performance capacity.

Embedded with ROYPOW batteries in electric excavators, businesses can expect uncompromising power performance and capability comparable to traditional diesel-powered solutions while reducing carbon footprint and enhancing sustainability and profitability.



Efficient and Stable

- ✓ More power with a high rate of discharge
- ✓ Consistent performance without the voltage drop at the end of the cycle
- ✓ Reduced unplanned downtime and maximized uptime



Worry-Free and Cost-Effective

- ✓ Long lifespan and no need for more batteries
- ✓ Zero maintenance and no frequent battery swaps
- ✓ Reduced battery maintenance labor costs



Green and Sustainable

- ✓ Reduced carbon footprint
- ✓ Good for excavator operators and the planet

Ideal Power Solutions

for A Full Day's Heavy-Duty Construction Work



Why ROYPOW Batteries



Safest LFP Chemistry

The excavator batteries are built with the LFP chemistry, proven the safest, most stable, efficient, and economical power option for industrial applications.



Long Lifespan

The batteries are designed for longevity with a lifespan of up to 10 years and can withstand over 3,500 times of deep charge and discharge.



Low Temperature Heating

The heating function will activate for stable charging and discharge at a low temperature during the cold months.



Automotive-Grade Rugged Durability

From the ruggedized, heavy-duty base to the internal structural supports, the batteries withstand the harsh vibrations and shocks of outdoor construction.



Built-in Fire Extinguishing System

Each battery is equipped with one or more specially designed fire extinguisher devices for fire protection.



Zero Maintenance

ROYPOW batteries eliminate the need for frequent swaps or maintenance, saving abundant time and costs to replace the battery on excavators.



IP65 Rated


The electrical components are fully enclosed to protect from dust and water ingress to fit different construction site environments.



*Designed for
Extended Heavy-duty
Excavation*

Charge Fast. Power Long

ROYPOW batteries support fast charge to increase the uptime and complete the construction tasks on schedule. A single full charge extends up to 10 hours of use for the best productivity. Operators can recharge the equipment during breaks or overnight to get well-prepared for another shift of hard work.

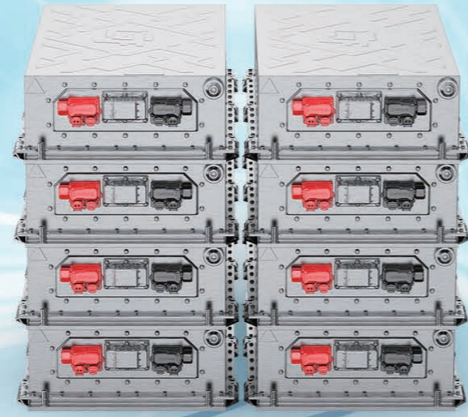

1 Hour DC Fast Charging Station

6 - 10 Hours* Continuous Use

*Actual battery duration time varies depending on different working conditions and the type of job.

Multiple Charging Ways

More Versatility and Flexibility



DC Fast Charging



Tow Charging



Mobile Container DC Charging

Intelligent Battery Management System (BMS)

ROYPOW's self-developed BMS ensures the electric excavator battery's peak performance and safety through real-time monitoring and multiple protections, maximizing efficiency and extending battery life.

- ✓ All-Time Cell Balancing and Energy Management
- ✓ Real-time Monitoring and Communication Through CAN
- ✓ Battery Maintenance and Remote Upgrades
- ✓ Fault Alarm and Safety Protection




Smart 4G Module (Optional)

ROYPOW smart 4G module can be customized in the excavator batteries to realize real-time remote monitoring.

- ✓ Battery Status Monitoring
- ✓ Remote Control
- ✓ GPS Location
- ✓ Remote Software Upgrades
- ✓ Easy Network Connection
- ✓ Faults Alarm

Liquid Cooling System (Optional)

A well-designed and high-quality thermal management solution can be customized to help dissipate the heat when the power goes up.

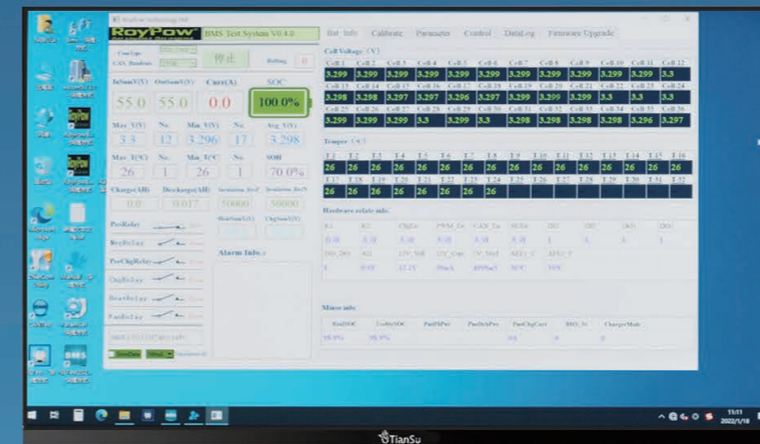

Tailored Battery Systems for Excavation Applications

From mini to large excavators



Technical Specifications



Model	Series/Parallel	Nominal Voltage	Nominal Capacity	Nominal Energy	Cycle Life	Continuous Charge / Discharge Current	Maximum Charge / Discharge Current	Dimensions (L*W*H)	Weight lbs. (kg)	IP Rating
CV150230	1S1P	153.6 V	230 Ah	35.328kWh	>4,000 Times	0.5C / 1C	1C (60S) / 2C(60S)	41.92x 24.80 x 9.44 inch (1065 x 630 x 240 mm)	94.80±4.41 lbs (243±5 kg)	IP67
CV115280	1S1P	115.2 V	280 Ah	32.256kWh	>4,000 Times	0.5C / 1C	1C (60S) / 2C(60S)	41.92x 24.80 x 9.44 inch (1065 x 630 x 240 mm)	94.80±4.41 lbs (235±5 kg)	IP67
CV115314	1S1P	115.2 V	314 Ah	36.17 kWh	>4,000 Times	0.5C / 1C	1C (60S) / 2C(60S)	41.92x 24.80 x 9.44 inch (1065 x 630 x 240 mm)	94.80±4.41 lbs (233±5 kg)	IP67
CV150230	n*S1P	n*153.6 V	230 Ah	n*35.328kWh	>4,000 Times	0.5C / 1C	1C (60S) / 2C(60S)	41.92x 24.80 x 9.44 inch (1065 x 630 x 240 mm)	/	IP67
CV115280	n*S1P	n*115.2 V	280 Ah	n*32.256kWh	>4,000 Times	0.5C / 1C	1C (60S) / 2C(60S)	41.92x 24.80 x 9.44 inch (1065 x 630 x 240 mm)	/	IP67
CV115314	n*S1P	n*115.2 V	314 Ah	n*36.17 kWh	>4,000 Times	0.5C / 1C	1C (60S) / 2C(60S)	41.92x 24.80 x 9.44 inch (1065 x 630 x 240 mm)	/	IP67
CV150230	1Sn*P	153.6 V	n*230 Ah	n*35.328kWh	>4,000 Times	0.5C / 1C	1C (60S) / 2C(60S)	41.92x 24.80 x 9.44 inch (1065 x 630 x 240 mm)	/	IP67
CV115280	1Sn*P	115.2 V	n*280 Ah	n*32.256kWh	>4,000 Times	0.5C / 1C	1C (60S) / 2C(60S)	41.92x 24.80 x 9.44 inch (1065 x 630 x 240 mm)	/	IP67
CV115314	1Sn*P	115.2 V	n*314 Ah	n*36.17 kWh	>4,000 Times	0.5C / 1C	1C (60S) / 2C(60S)	41.92x 24.80 x 9.44 inch (1065 x 630 x 240 mm)	/	IP67

Working Temperature Range

Charge Temperature: 32°F~131°F (0°C ~ 55°C)
 Discharge Temperature: -4°F~131°F (-20°C ~ 55°C)

Storage Temperature Range

Short-term (Within One Month): -4 ~ 113°F (-20 ~ 45°C)
 Long-term (Within One Year): 32 ~ 95°F (0 ~ 35°C)

Note: 1. Only authorized personnel are allowed to operate or make adjustments to the batteries.
 2. All data are based on ROYPOW standard test procedures. Actual performance may vary according to local conditions.